

## 2195 C Series Manual Pressure Controllers



*Tradinco Instruments has developed a new range of pneumatic pressure control modules, the 2195C series.*

*These series of manual pressure controllers are the ideal instruments for controlling any required test and calibration pressures in dead-end systems.*

*The 2195 C series is a Eurocassette instrument (36TE/3HE), and suitable to be integrated into the most common types of workbenches.*

*The many configurations, enables the user to select the the maximum functionality and ease of use for all applications.*

*The 2195C series complements the 2195P Precision pressure indicators, resulting in the excellent calibration solutions.*


# STANDARD CONFIGURATIONS

## Model 2195 CLPC

Low pressure controller with integrated handpump, volume regulator and ventvalve for generating and fine control of the testpressure. No external pressure supplied is required.

Pressure ranges within 0.....1 barg

Connections: polyflo

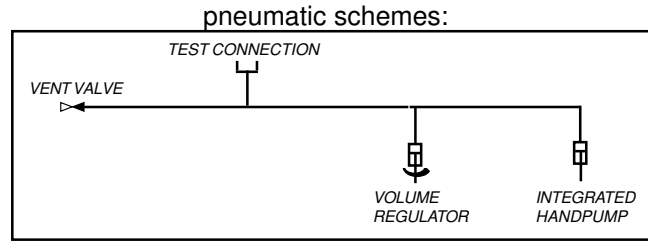


## Model 2195CPC

Pneumatic Pressure Controller with pre-adjustment pressure regulator and precision volume regulator. Built-in pneumatic switch for leakdetection.

An external air supply up to 15 bar is required.

Pressure ranges within 0.....10 barg.

Connections: polyflo

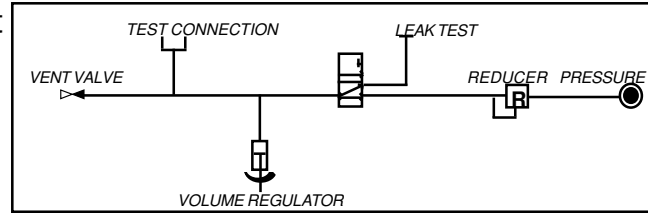

## Model 2195CVC


Pneumatic calibrator for vacuum pressure.

Two needle valves for fine control of the test pressures.

An external vacuum pump is required.

Pressure ranges within 0.....-1 barg

Connections: polyflo

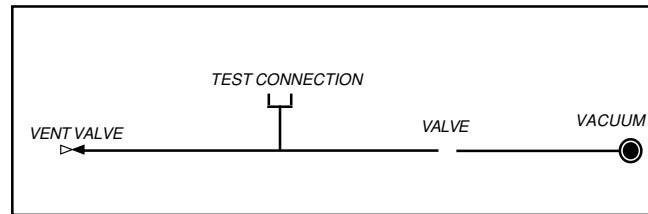

## Model 2195CAC


Pneumatic calibrator for absolute pressures.

The three needle valves control the test pressures.

Vacuum and pressure supply is required..

Pressure ranges within 0.....10 bara

Connections: polyflo

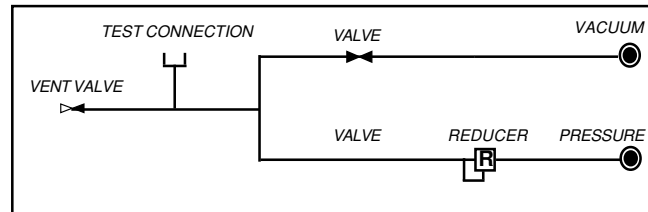


## Model 2195CHPC

This is a high pressure controller with high pressure precision regulator and two sensitive re-adjustable needle valves used to accurately adjust the test pressures. The unit requires an external air supply not exceeding 350 bar.

Pressure ranges within 0.....350 barg

Connections: minimess

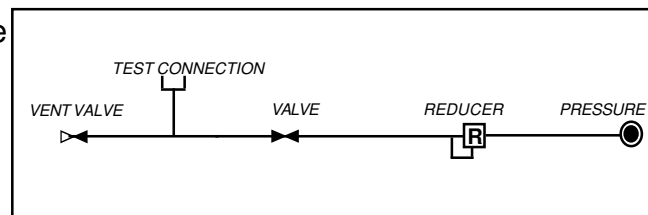

**Combined and custom-made configurations are available upon request.**

Distributor: